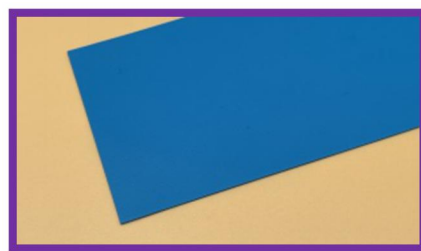
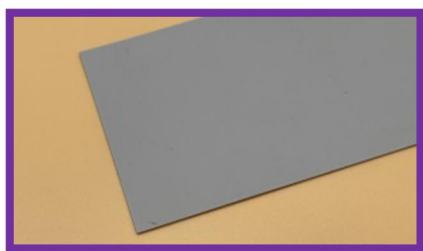


PVC TARPAULIN FOR BOAT 500D*500D 28*28 650GSM**Features**

- Excellent tensile strength, tear resistance, extremely soft hand feeling
- Waterproof, flame retardant, Anti-UV, Anti-Bacterial, Anti-Mildew, Oil resistant
- Durable, wipe clean and easy to store away
- heavy duty and durable materials All colors are available

Product Overview**Technical Data Sheet**

Item Code		PTBFWM650	Test Method
Base Fabric		500D*500D 28*28	DIN EN ISO2060
Weight (GSM)		650	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	2100	DIN53354
	Weft (N/5cm)	2100	DIN53354
Tear Strength	Warp (N/5cm)	110	DIN53363
	Weft (N/5cm)	110	DIN53363
Peeling Strength	Warp (N/5cm)	120	DIN53357
	Weft (N/5cm)	120	DIN53357
Temperature		-30°C/+70°C	
Flame Retardant		B1/M1/M2/NFPA701	
Lacquering (Optional)		Acrylic/ PVDF	
Special Treatment		Anti-Wicking/Anti-UV/Anti-Aging/Cold Resistant/Osmosis Prevention/Mildew Resistant	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat: +86-15858322153
mailto:hncomax@163.com jeff@hncomax.com

